

VISIBLE RF PATH INDICATOR. (OPTION "SS")
 ## REMOVE SCREW FOR ACCESS TO MANUAL OVERRIDE.

TOP EXTERIOR SCREW CAN BE REMOVED ALLOWING ACCESS TO MANUAL OVERRIDE. No. 1 PHILLIPS SCREWDRIVER REQUIRED.

SPECIFICATIONS;
 FREQ RANGE (GHz) — 75.0 - 110.0
 VSWR — 1.20 : 1 MAX
 INSERTION LOSS — 0.40 db, MAX
 ISOLATION — 50 db, MIN
 SWITCHING TIME — 50 mSec, TYP
 PRESSURE — TO 30 PSIG (R-F HEAD)
 FINISH — IRIDITE ON FLANGES, SATIN BLACK ENAMEL ON BODY.

NOTES:
 1. ** MANUAL SWITCH DOES NOT INCLUDE RECEPTACLE.
 2. BLUE BOXES ARE REQUIRED FIELDS.
 3. !! IF OPTION IS NOT REQUIRED, LEAVE (GOLD BOX) BLANK

VOLTAGE	AMPS	CODE
+22 TO +32	0.9	A
-22 TO -32	0.9	B
+10 TO +14	1.5	C
-10 TO -14	1.5	D
+44 TO +54	0.5	E
-44 TO -54	0.5	F
117VAC	0.5	H
235VAC	0.5	K
MANUAL **		M

PART NUMBER SELECTION

!! OPTION	CODE
METRIC THREAD	M

CODE	FLANGE
P	PLAIN (ROUND)


!! OPTION	CODE
SPDT	1

CODE	ENVIRONMENTAL
S	SEALED
SS	## SEALED WITH REMOVABLE SCREW


10	P			
PART NO. SERIES	10 CODE	FAILSAFE	F	!! OPTION
		!! OPTION		CODE

!! ELECTRICAL CIRCUIT (IF OTHER THAN STD.) SEE SCHEMATIC PAGE

PART NO. EX.: 10AP1S6A
 WR10 LATCHING WG SW., +28VDC, PLAIN ROUND FLANGE SPDT (COVER PLATE ON PORT 4), SEALED, #6A CIRCUIT

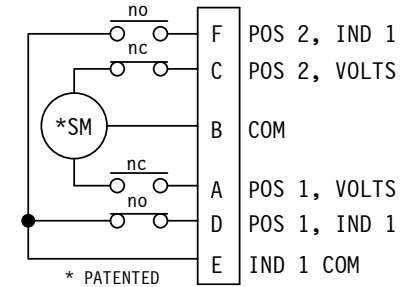

* PATENTED
 STD. ELECTRICAL CKT. Shown in Position 1 ONE FORM C

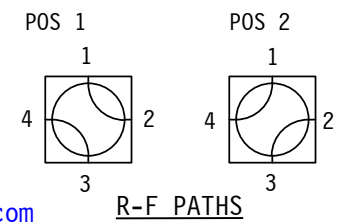

WEB SITE: www.sectormicrowave.com

A RELEASED.		TN 7/25/06		DRAWN AC 7/25/06		SECTOR MICROWAVE IND., INC.					
DESCRIPTION		DATE		CHECKED				WR10 WG SW. : SEALED SERIES			
ZONE	LTR	DESCRIPTION	APV	DATE	APVD	RR	7/25/06	SIZE L	CAGE CODE 53263	WR10 SEALED SER.	A
REVISIONS				TOLERANCES: DECIMALS		APVD		SCALE: NONE	UNIT WT.	SHEET 1 OF 1	REV.
				2 PLACES: +/- .03							
				3 PLACES: +/- .010							
				FRACTIONS: +/- 1/32							
				ANGLES: +/- 1/2 deg.							